

Numbering System for Wet Cubicle System NYLON LINE

SD-11.10.100.00/00

Status

Page

10 Product information

000 - Single parts of Wet Cubicle System

060 - Product table Privacy Thumturn 840...

065 - Mortice locks ERS 76

20 Fixing recommendations (Installation Guidelines)

000 - Example of Assembly Wet Cubicle System

010 - Packages tubes

020 - Single parts tubes

030 - Panel holders

040 - Adjustable foot

050 - Cubicle hinges

060 - Privacy thumbturn

061 - Wet cubicle lock

070 - Door knob

080 - Anti-vision strip






081 - Leading edge finger protection strip

090 - Examples


100 - Fixing material

Single parts of Wet Cubicle System NYLON LINE

Tubes Ø34mm

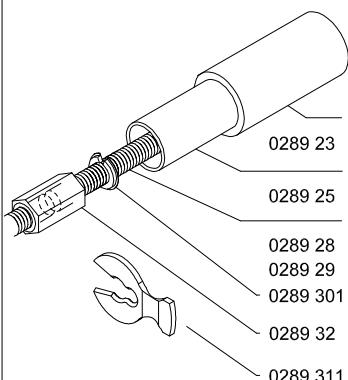
0289 33 **Jointing piece, steelcored**0289 15 **Wall fixIng, steelcored**0289 34 **Bend 34,90 degree, steelcored**0289 35 **Bend 34,45 degree, steelcored**0289 36 **T-Piece, T.34, 58x98mm, steelcored**

Tubular panel holder



0289 04 **Tubular panel holder**
for panel thickness 13mm,
incl. fixing material

Wall panel holder




0289 06 **Wall panel holder**
for panel thickness 13mm,
incl. fixing material
für Plattenbefestigung

Right angle bracket




0289 05 **Right angle bracket**
incl. cover caps

Adjustable foot



Adjustable foot without anchor fixing
(for glueing or screwing)
for panel thickness 13mm,
incl. fixing material for panels

0289 12 non-corrosive steel core
0289 02 galvanized steel core



Adjustable foot with anchor fixing
for panel thickness 13mm,
incl. fixing material for panels

0289 13 non-corrosive steel core
0289 03 galvanized steel core

Panel holder - single parts



0289 10 **Screw cover caps (set)**
for all panel holders




0289 08 5x20mm (for articles 0289 04 / 06)
0289 09 5x30mm (for articles 0289 02 / 03 / 12 / 13)



0289 62 **Spacer for panel holder and adjustable foot**
3mm thick, for panel thickness 10mm
1 set = 10 pieces

Single parts of Wet Cubicle System NYLON LINE

Cubicle hinges TB 78, TB 82



Cubicle hinges, steelcored

- 0341 01 TB 78 DIN right
0341 02 TB 78 DIN left


Cubicle hinges, springloaded (standard: door closed)

- 0529 01 TB 82 DIN right
0529 02 TB 82 DIN left

Cubicle hinges, springloaded (standard: door open)

- 0529 03 TB 82 DIN right
0529 04 TB 82 DIN left

Wet cubicle lock




Wet cubicle lock

for panel thickness 13mm

- 0290 01 Wet cubicle lock TWS 94 LI Münz (left, coin release)
0290 02 Wet cubicle lock TWS 94 RE Münz (right, coin release)
0290 11 Wet cubicle lock TWS 94 LI Dorn (left, key release)
0290 12 Wet cubicle lock TWS 94 RE Dorn (right, key release)

Privacy thumbturn




Privacy thumbturn

for panel thickness 13mm

- 0840 01 TWR 840.01 Münz (coin release; non-corrosive) *
0840 03 TWR 840.03 Münz (coin release; galvanized) *
0840 18 TWR 840.18 Dorn (key release; non-corrosive) *
0840 02 TWR 840.02 Dorn verdeckt (key release, concealed; non-corrosive)*

(* relevant for spindle and screws)

Door knobs




Door knob

- 0234 10 TK 80 Pair

Door knob, buffered

- 0234 11 TK/KP 80 Pair, one side buffered


Anti-vision strip



- 0289 44 Anti-vision strip

- o PVC with rubber lip
- o Length 2050mm

Leading edge finger protection strip



- 0289 45 Leading edge finger protection strip

- o PVC with rubber lip
- o Length 2050mm

Product table Privacy Thumbtturn 840..

Privacy Thumtturn 840...

(recommended only for door thickness up to 30mm)

TWR 840... complete		Single parts TWR 840..						
		Spacer	Screw pack (2 Countersunk screws)	Spindles for: TWR 840...				
				Coin release 8				
				Key release 8				
				Key release 8 concealed				
Version:		Product code	(TS) door thickness	A thickness of spacer	Abm. length of screw M4x	Material	L length of spindle	Material
 TWR 840 coin release 8		0840_19	9-12	—	20	A2	40	cC
		0840_01	13-17	—	25	cC	44	cC
		0840_03	13-17	—	25	A2	44	A2
		0840_06	18-22	—	30	A2	50	cC
		0840_04	23-27	—	35	A2	55	cC
		0840_05	28-32	—	40	A2	60	cC
		0840_23	33-37	—	45	A2	65	cC
		0840_26	33-37	—	45	A2	64	A2
		0840_09	9-13	14	35	A2	54*	A2
		0840_21	9-13	14	35	A2	55	cC
		0840_08	9-13	12	30	A2	54*	A2
		0840_07	11-15	17	40	A2	60	cC
		0840_25	26-30	17	55	cC	75	cC
 TWR 840 Key release 8		0840_17	9-12	—	20	A2	44	A2
		0840_18	13-17	—	25	A2	49	A2
		0840_13	18-22	—	30	A2	54	A2
		0840_11	23-27	—	35	A2	59	A2
		0840_10	9-13	14	35	A2	59	A2
		0840_16	11-15	12	35	A2	59	A2
		0840_24	11-15	17	40	A2	64	A2
		0840_20	14-18	14	40	A2	64	A2
		0840_15	19-23	14	45	A2	69	A2
		0840_27	36-40	12	60	cC	84	A2
 TWR 840 Key release 8 concealed		0840_32	8-12	—	20	A2	40	cC
		0840_02	13-17	—	25	cC	40	cC
		0840_12	28-29	—	40	A2	50	cC
		0840_22	9-13	14	35	A2	50	cC


cc: Spindle, galvanized

A2: Stainless steel spindle


Morticle locks ERS 76

Mortice locks made of high quality plastics


- corrosion resistant
- maintenance-free
- especially for cabin doors
- in forend form 4.5mm or 13mm
- for installation in doors with door thickness of min 22 mm

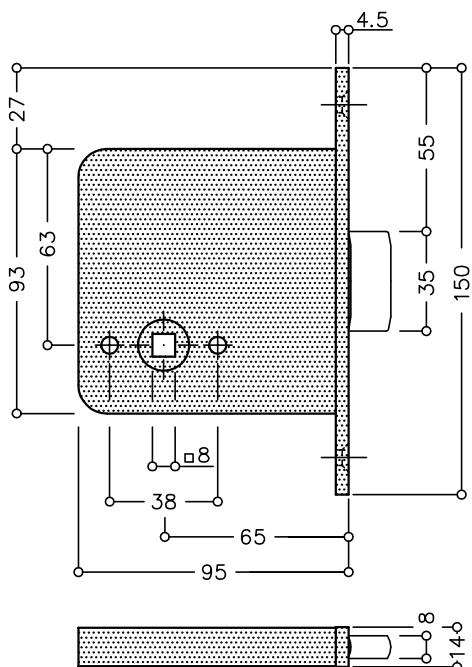


0256 060 ERS 76 WC STULP 4.5

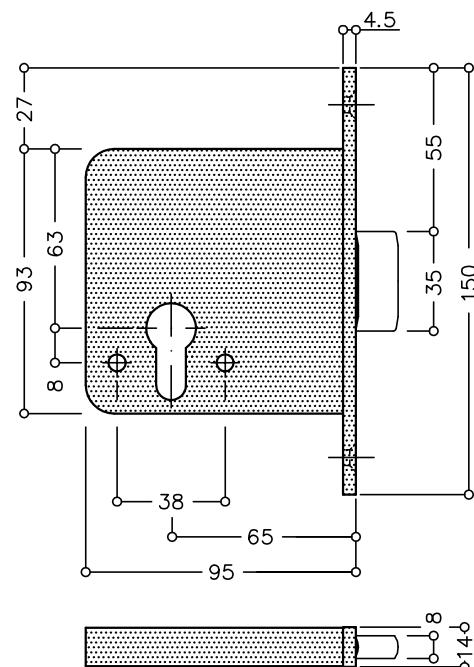

0256 050 ERS 76 PZ STULP 4.5

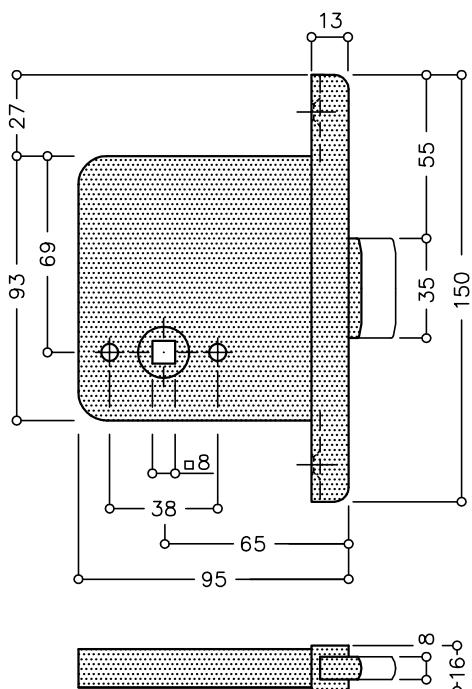


0256 010 ERS 76 WC STULP 13

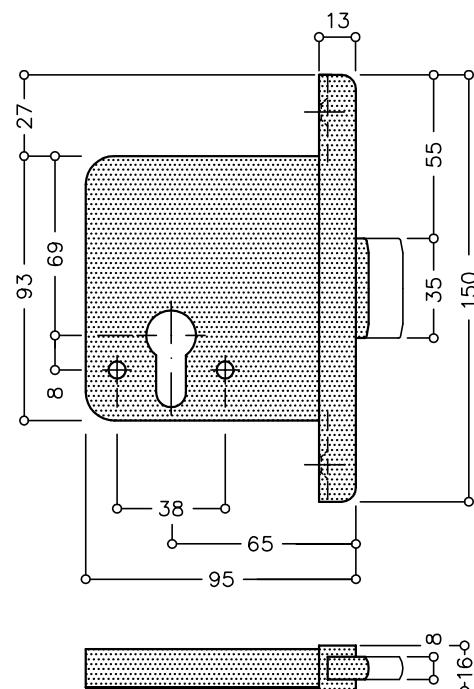

0256 020 ERS 76 PZ STULP 13



Example of Assembly of a Wet cubicle system NYLON LINE

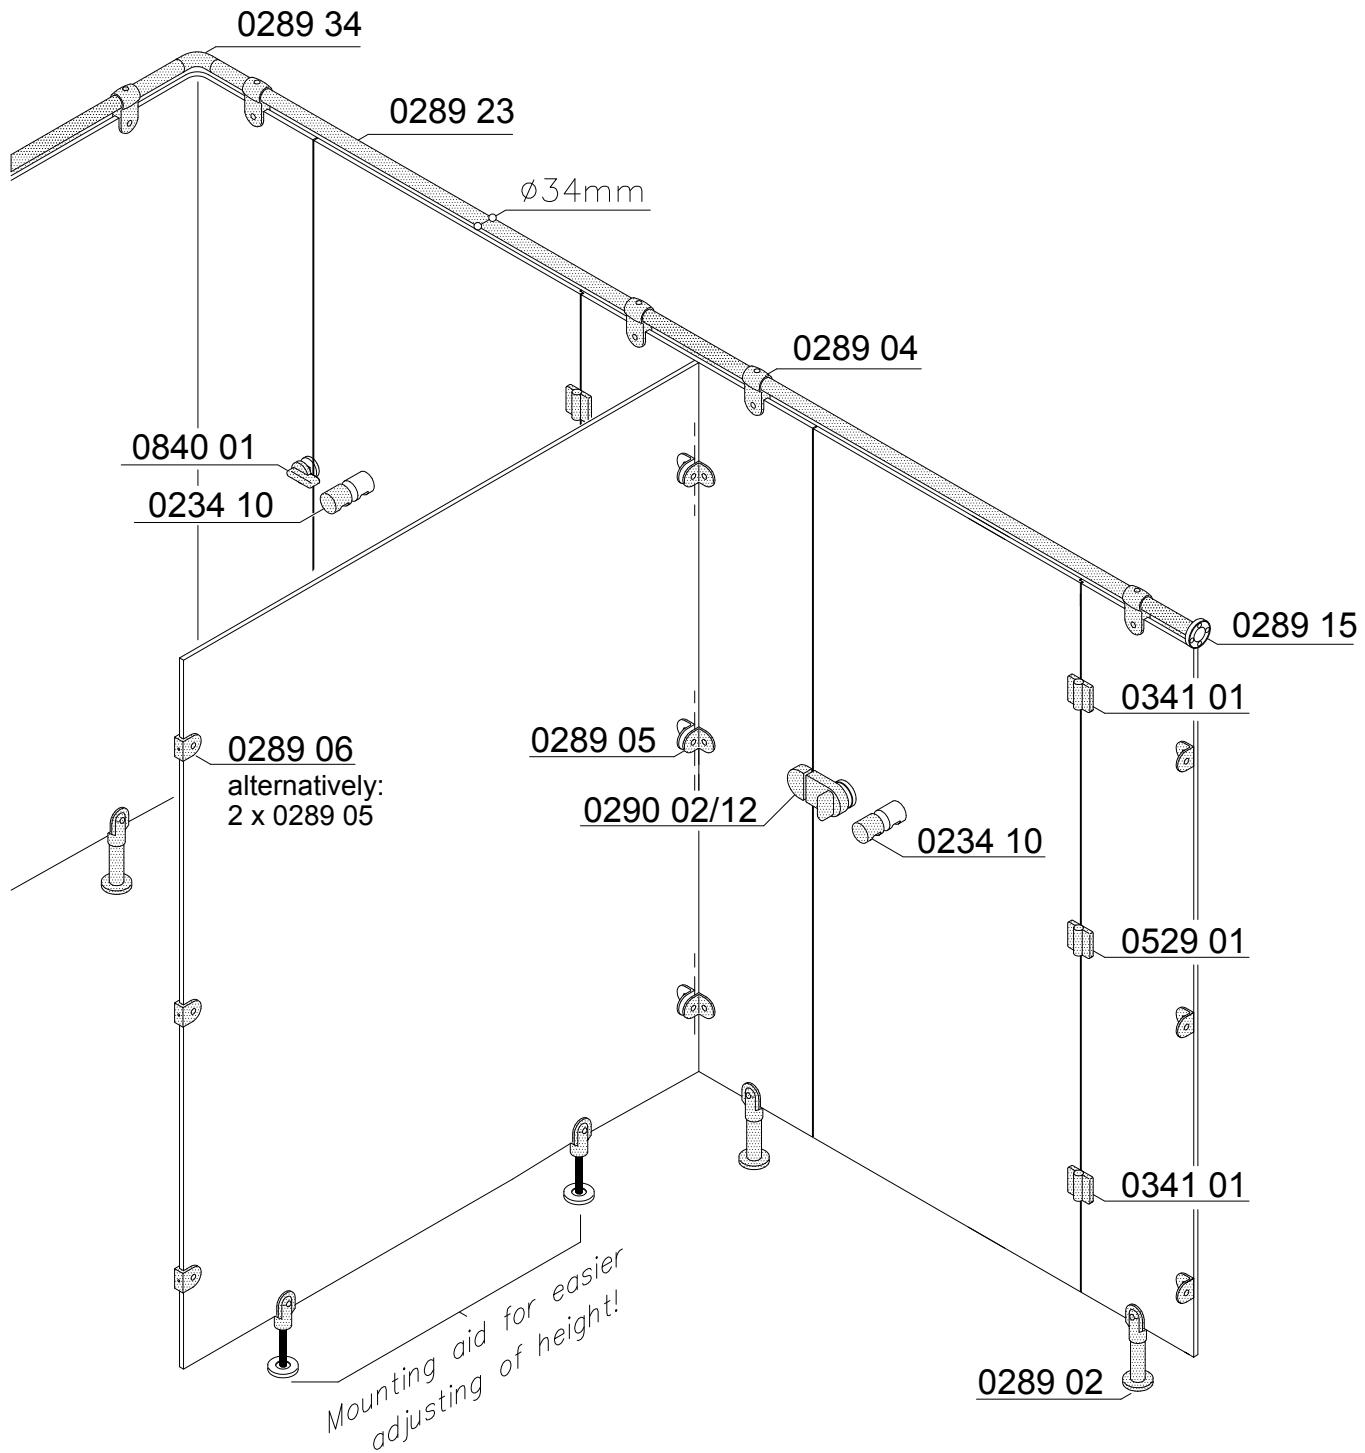



Packages Tubes Ø34mm Wet cubicle system

Packages Tubes Ø34mm



Tubes and threaded rod
Length (mm):

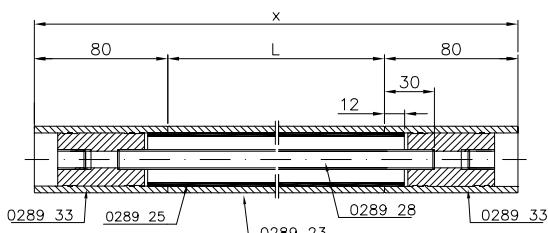



Nylon tube: $L = x - 160$
Steel tube: $L + 24$
Threaded rod: $L + 60$

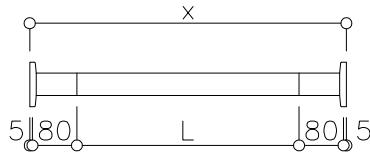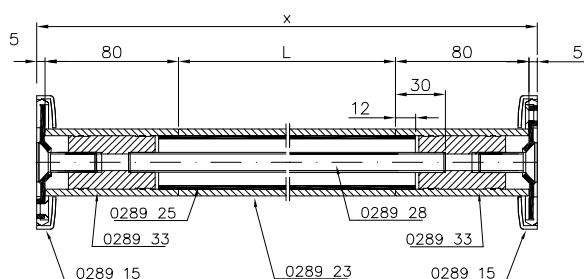



Nylon tube: $L = x - 170$
Steel tube: $L + 24$
Threaded rod: $L + 60$

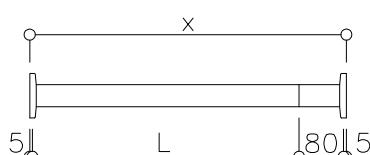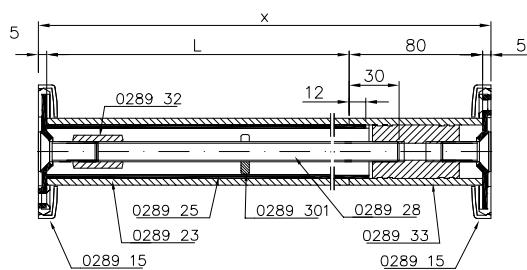

Nylon tube: $L = x - 90$
Steel tube: $L + 12$
Threaded rod: L

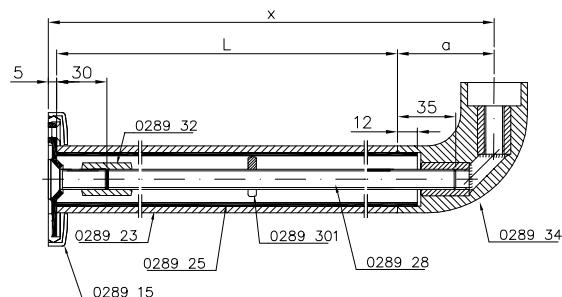


Nylon tube: $L = x - 5 - a$
Steel tube: $L + 12$
Threaded rod: $L + 5$

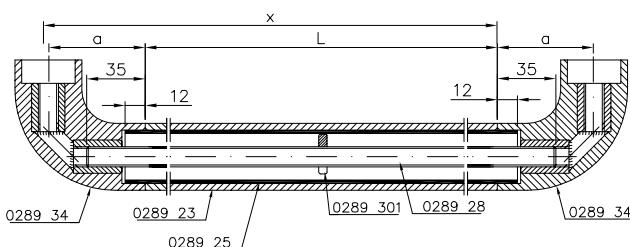


Nylon tube: $L = x - 2a$
Steel tube: $L + 24$
Threaded rod: $L + 70$

Single parts tubes Ø34mm: tube

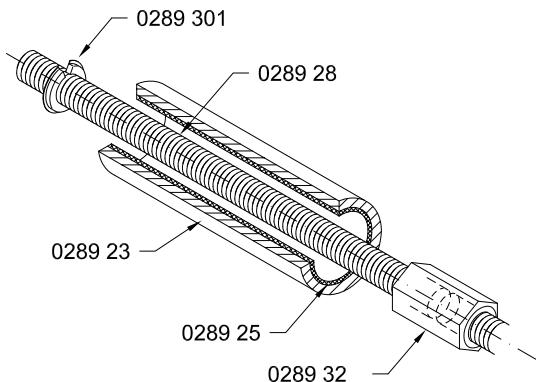


Railing

Comprises of 4mm Nylon sleeves PA 6 (0289 23), 2mm steel tube (0289 25), threaded rod (0289 28), connection nut (0289 32) as well as distance clips (0289 301) "see drawing".




0289 23 Nylon tube 34.720

- Deburr ends of Nylon tube Ø34x4mm (max. length supplied 720mm). Slide Nylon tube over steel tube.




0289 25 Steel tube 26x2

- Deburr ends of steel tube Ø26x2mm. The steel tube supplied has a length of 6m, corresponding at the same time to maximum length of each tube element.
- Before installation both tubes as well as threaded rod have to be cut into necessary lengths. Please refer to SD-11.20.010.00 for some examples.



0289 28/29 Threaded rod M12

- Threaded rod M12 can be ordered in length of 2m (0289 28) and 3m (0289 29). In case of greater lengths they can be extended to determined length by means of jointing nuts.



0289 32 Jointing nut M12x30


- Jointing nut is also necessary for installation of steel cored 45 degree bend (0289 35) as well as for direct connection of threaded rod to steel reinforced wall fixing (0289 15).



0289 301 Distance clips for steel tube 26x2

- Distance clips are put on threaded rod in a distance of approx. 0.5m in order to center the threaded rod within the tube as well as to avoid noise in case of stronger shocks. Pack of 10.


Single parts tubes Ø34mm: jointing pieces for tubes



0289 330 Jointing piece Ø34x80, reinforced

Comprises an inside thread M12 on both ends. The jointing piece can be used in front of the wall fixing, for bracing of Nylon tubes or as jointing piece for several longer tubing elements.

- The jointing piece has a 12mm recess in each end for attachment of steel tube and a threaded female connection 30mm deep for threaded rod. See examples on page SD-11.20.010.00.

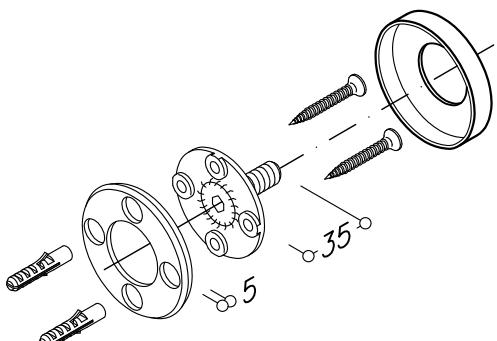


0289 150 Wall fixing, reinforced

(0289 150) Comprises steelcored mounting plate, welded countersunk screw M12x35mm, underpart of the rose and Ø70mm rose cover.

- Press underpart of the rose on steelcored mounting plate directly on so that it is the wall when being mounted. Before screwing plate on rail, slide rose cover over Nylon tube.

- When attaching to the wall fixing the length can be adjusted up to 5mm by axial twisting. After having attached steelcored plate to wall clip rose cover on wall fixing. We recommend for wall fixing 6x60mm screws and S8 plugs. Wall fixing can either be attached to threaded rod by connection nut or directly to bend or jointing piece. Please refer to tabulation of correct cutting of length on page SD-11.20.010.00.

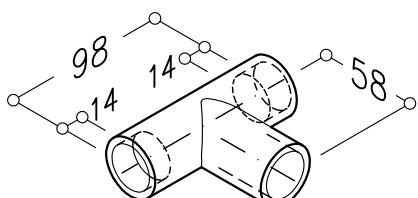


0289 360 T-Piece Ø34.58x98, reinforced

The vertical member of the T-piece has a drill hole of Ø12.5mm.

- The threaded rod is continuous. Nylon and steel tubes have to be cut to required length.


The vertical member of the T-piece contains a M12 female thread. Please refer to jointing piece (0289 33) or wall fixing (0289 15) respectively for connection to the rail element.



0289 340 Bend Ø34.90 degree, steelcored

90 degree bend steelcored is provided with an inside thread M12 on each end. The 90° bend has a 12mm recess for attachment of steel tube and a threaded female connection 35mm for the threaded rod.


- Turn bend until all joints are closed.



0289 350 Bend Ø34.45 degree, steelcored

The reinforced bend is provided on both ends with an inside thread M12. The bend has 12mm recess for attachment of steel tube and a threaded female connection 30mm for the threaded rod.


Single parts tubes Ø34mm: tubular panel holder

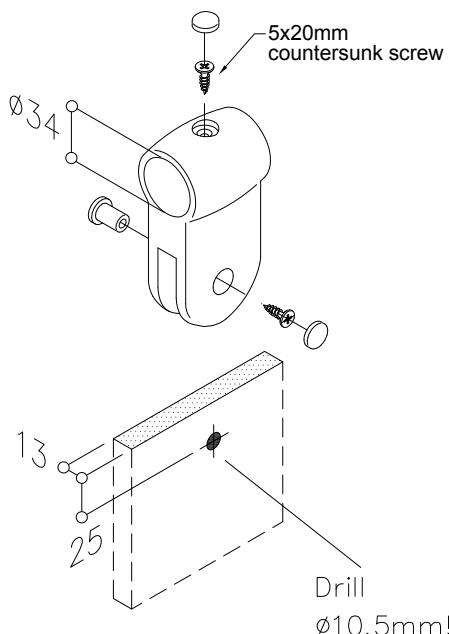**0289 04 Tubular panel holder**

Supplied complete with 2 Nos 5x20mm countersunk screws, 2 Nos screw cover caps and 1 socket.

- Slide tubular panel holder (0289 04) over Nylon sleeve before attaching either the wall fixing (0289 15) respectively bends (0289 34 / 0289 35) or T-piece (0289 36).
- Drill a Ø10.5mm hole in the panel 25mm from its edge in the required position. Fix panel holder to rail by first drilling Ø4mm pilot through top of holder and secure with self taping screw 5x20mm provided.
Cover screw heads with caps provided.


Wall panel holder

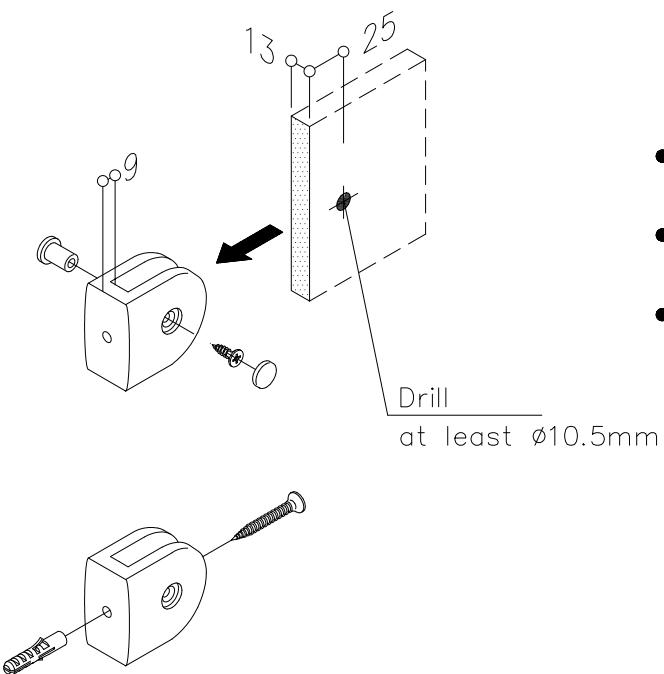**0289 06 Wall panel holder**

The wall panel holder is supplied complete with 5x20mm countersunk screws, screw cover cap and screw socket for panel fixing.

- Drill a Ø10.5mm hole in the panel 25mm from its edge (flush installation) in a corresponding position to the wall fixing.
- When fixing to a flush wall the clearance between panel edge and wall will be at least 9mm.
- We recommend 6x60mm countersunk screws and S8 plug for wall fixing.


Right angle bracket

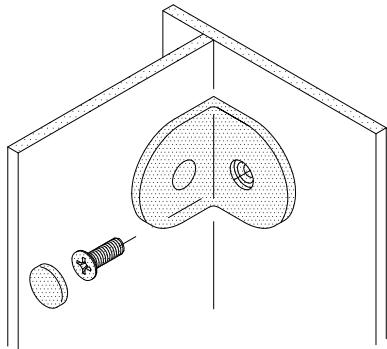

0289 05 Right angle bracket


Each bracket is supplied with 2 Nos screw cover caps only and may be used in different types of installation. This bracket can also be used for installing panel to panel or panel to wall.

Individual fixing to panel:

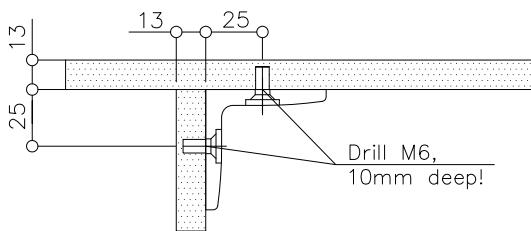


- For individual or misaligned back to back fixing, we recommend that the drilled hole in the panel be M6 to a depth of 10mm. Using M6x14mm countersunk screws either self tap the hole or screw into brass plugs.
- In all instances the panel should be drilled 25mm from the angle in the required position.

Aligned back to back fixing (panel):

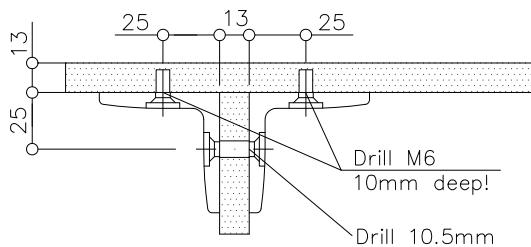


- For aligned back to back fixing drill the panel to Ø10.5mm and use M5x14mm countersunk screws together with M5x15mm sockets. We recommend that the drilled hole in the panel be to a depth of 10mm.

Fixing to brick wall:



- For fixing the right angle bracket to a brick wall we recommend the use of M6x60mm countersunk screws together with S8 plugs.


Adjustable foot

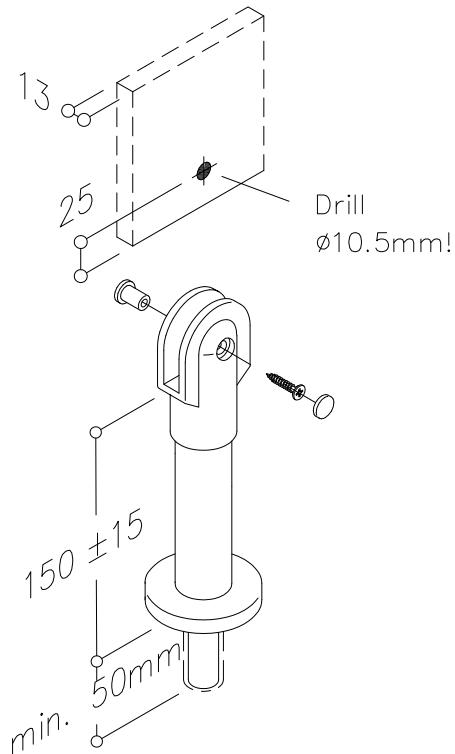

0289 03 Adjustable foot with anchor fixing

Each adjustable foot incorporates a panel holder bracket (with socket, screw cover cap and 5x30mm countersunk screw for panel fixing), Nylon sleeve, base plate with anchor and a Ø70mm rose cover.

- To attach the adjustable foot to the panel a Ø10.5mm hole should be drilled 25mm from the edge.
- To fix the anchor to the floor requires a Ø16mm minimum hole to be drilled to a depth of 50mm into which the anchor is located.
For floor fixing we recommend 6x60mm countersunk screws together with S8 plugs.
Should the anchor hole exceed 16mm the use of a suitable grout or filler is recommended.

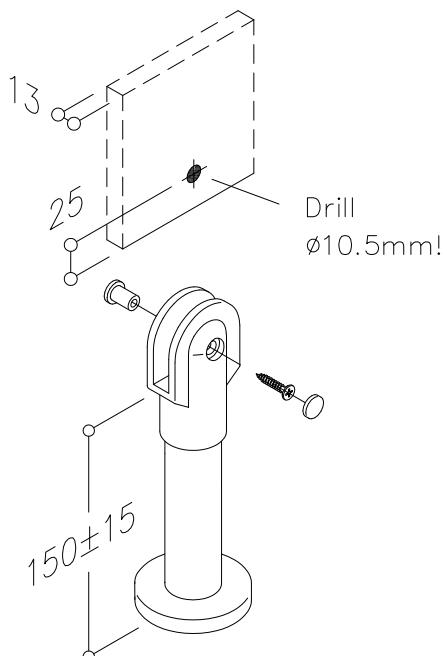

0289 02 Adjustable foot without anchor fixing

Incorporates all as above except the anchor stub and attached the panel in the same way.

- To fix the base plate to the floor re recommend the use of 6x60mm countersunk screws together with S8 plugs.
- Alternatively, we recommend the use of Loctite Activator 738 and glue 329 or 30 to stick the base plate to the floor surface.

Our tip: The adjustable foot without anchor fixing and without Nylon tube is perfect for mounting because the height of the panels can be adjusted easily.

Fixing instruction - Spacers


0289 62 Spacers

- For panel thickness of 10mm

- Can be used with:

0289 04 Tubular panel holder
0289 06 Wall panel holder
0289 03/0289 02 Adjustable foot

- Order quantity 1 = 10 pieces

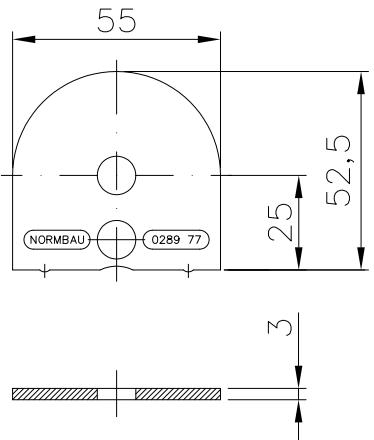


Cubicle hinge, standard Cubicle hinge, springloaded

0341 010/020 Cubicle hinge TB 78 standard, right/left


0529 010/020 Cubicle hinge TB 82 springloaded, right/left

- Tension the spring of TB 82 hinge by using a screw driver and then secure with 2.5mm hexagon socket key (not supplied).
- Put the cover cap into drilling.

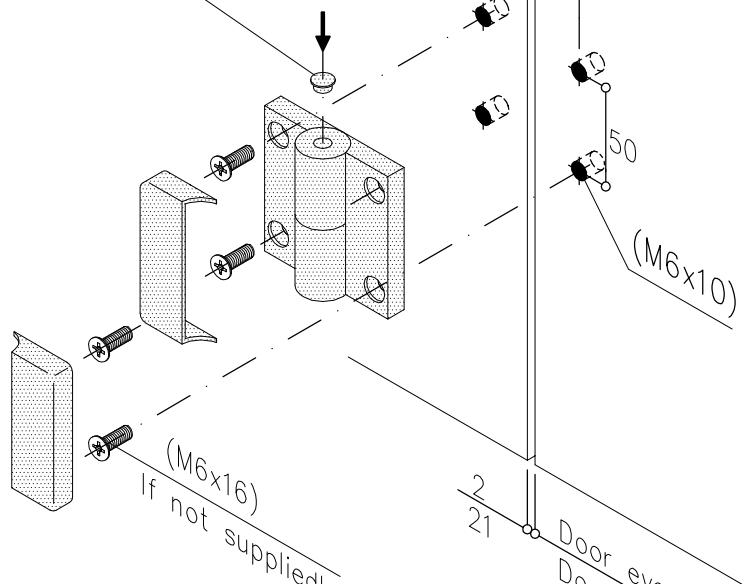


- Maximum loading:
with 2 hinges up to 40kgs
with 3 hinges up to 60kgs

Door even with frame!




Door not even with frame

034103 Washer 2mm
034104 Washer 3mm
034106 Washer 12mm
034107 Washer 14mm



Door and frame with anti-vision strip




Cubicle hinge standard	0341 010 TB 78 DIN right	0341 020 TB 78 DIN left
Door closing	0529 010 TB 82 DIN right * 0529 050 TB 82 DIN right * To take the door off its hinges!	0529 020 TB 82 DIN left * 0529 060 TB 82 DIN left * To take the door off its hinges!
Cubicle hinges - springloaded Door opening	0529 030 TB 82 DIN right OR max 90°	0529 040 TB 82 DIN left OL max 90°

Privacy Thumturn TWR 840

0840 01 Privacy Thumturn TWR 840


Supplied with 2 Nos M4x20mm countersunk screws.

- To fix drill an 18mm diam. hole 30mm from the inside of the panel or door.
- Next drill two further 7mm diam. holes 19mm from the left and right of the C/L of the first hole.

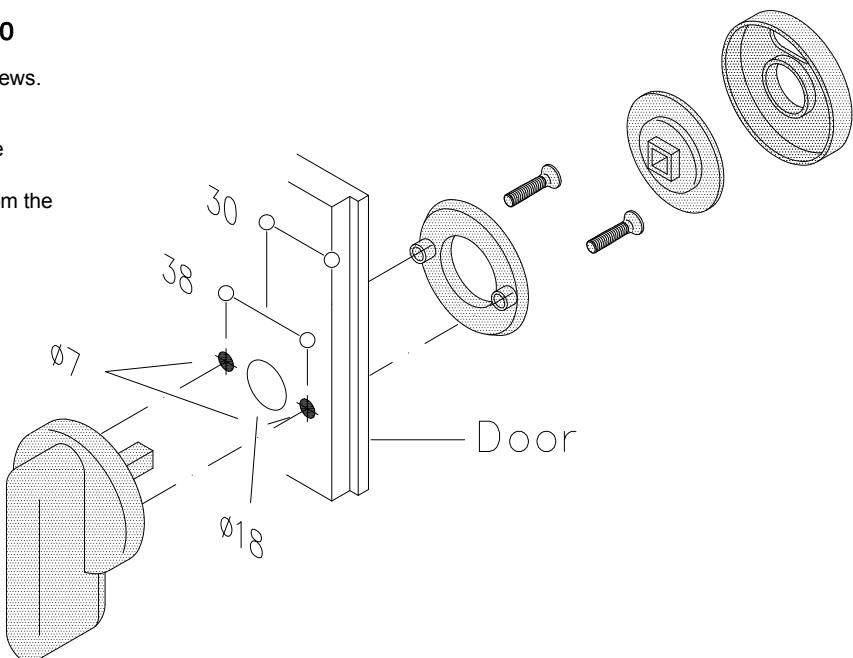


Door opening inwards:
Thumturn to be mounted on fix element!

Rebated door, DIN right

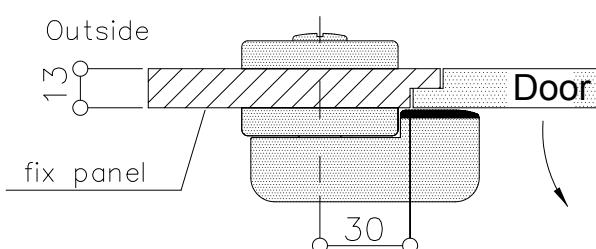


Door opening outwards:
Thumturn to be mounted on door!


Rebated door, DIN left

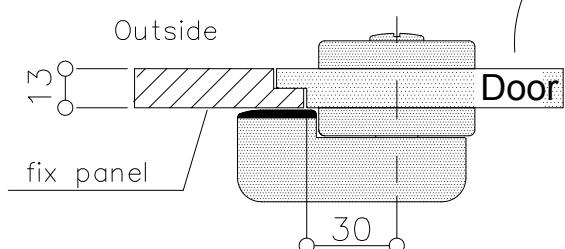


Rebated door with inserts, DIN right

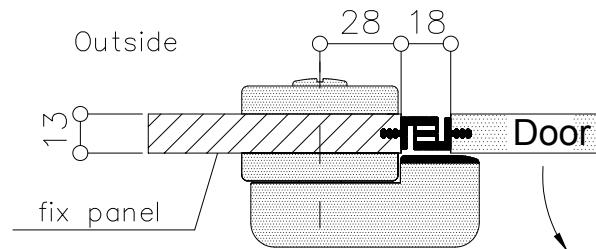


Rebated door with inserts, DIN left

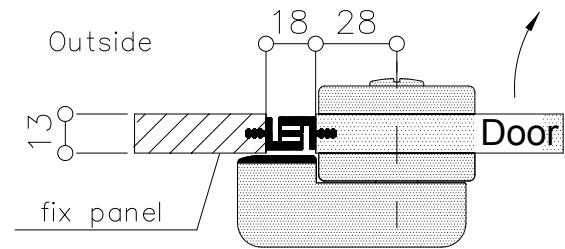

Offset / overlapped door, DIN right

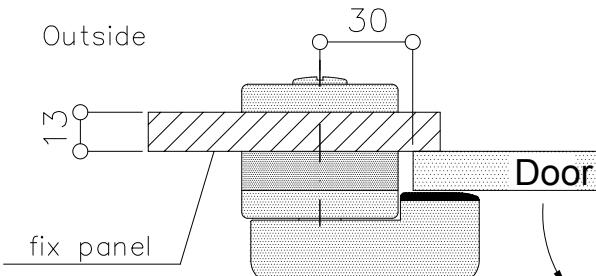

Offset / overlapped door, DIN left

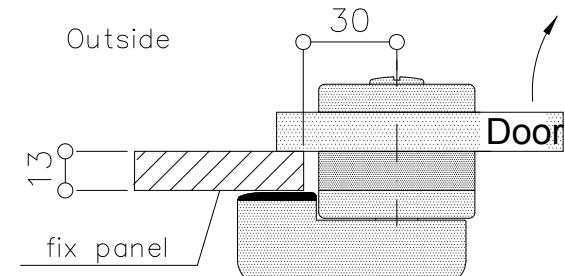

Wet cubicle lock TWS 94 ...

0290 01 Wet cubicle lock TWS 94 LI Münz TS* 13mm
(coin release, left hand side)

0290 02 Wet cubicle lock TWS 94 RE Münz TS* 13mm
(coin release, right hand side)

0290 11 Wet cubicle lock TWS 94 LI Dorn TS* 13mm
(key release, left hand side)


0290 12 Wet cubicle lock TWS 94 RE Dorn TS* 13mm
(key release, right hand side)

- Three bolt-through drillings in the door are necessary:
Drill a Ø18mm diam. hole in the door 50mm from its outer edge. Drill two further Ø7mm diam. holes, each with 19mm distance on the left and right side to the hole diam. Ø18mm. Two additional holes for countersunk screws M6x20 are provided in the lock.

- For fixing of the locking device two blind holes M6 are necessary.

There is an additional screw hole for countersunk screws M6x20 provided in the locking device.

Definition TWS 94 RE:
Knob closing clockwise rotating!

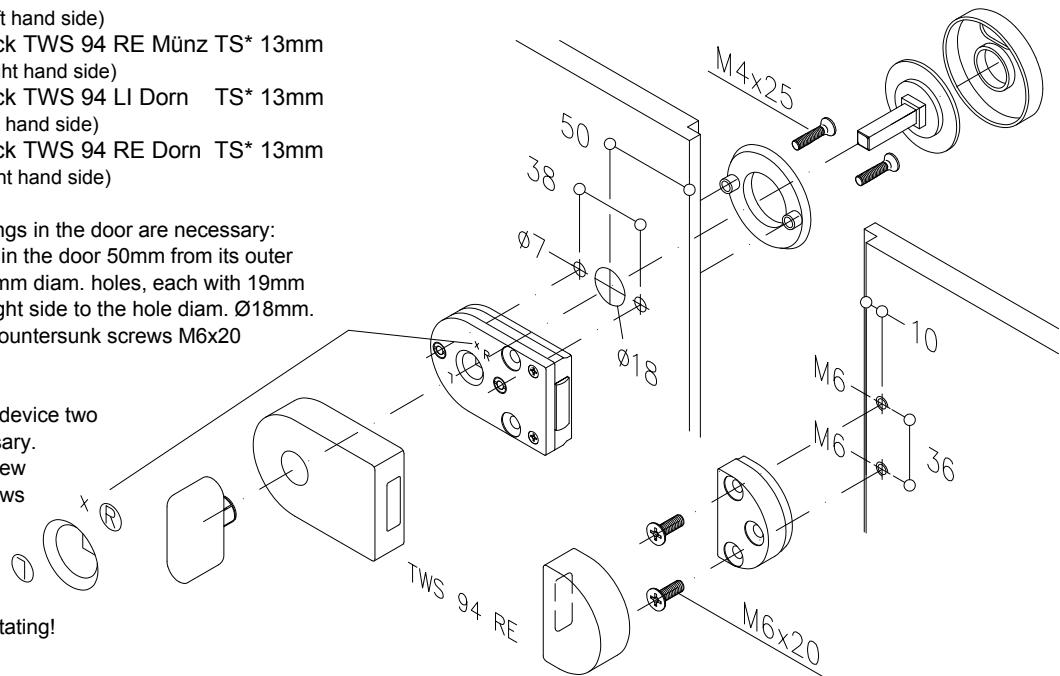


*TS = door thickness

Door opening inwards, lock mounted on door.	Cabin door 13mm, with leading edge finger protection strip, DIN left Door 0290 10 Lock TWS 94 RE Münz TS 13mm (coin release) 0290 11 Lock TWS 94 RE Dorn TS 13mm (key release)	Cabin door 13mm, with leading edge finger protection strip, DIN right Door 0290 01 Lock TWS 94 LI Dorn TS 13mm (coin release) 0290 02 Lock TWS 94 LI Münz TS 13mm (key release)
	Cabin door 13mm, rebated, DIN left Door 0290 10 Lock TWS 94 RE Münz TS 13mm (coin release) 0290 11 Lock TWS 94 RE Dorn TS 13mm (key release)	Cabin door 13mm, rebated, DIN right Door 0290 01 Lock TWS 94 LI Dorn TS 13mm (coin release) 0290 02 Lock TWS 94 LI Münz TS 13mm (key release)
Door opening outwards, lock mounted on side part.	Cabin door 13mm, rebated, DIN right Door 0290 10 Lock TWS 94 RE Münz TS 13mm (coin release) 0290 11 Lock TWS 94 RE Dorn TS 13mm (key release)	Cabin door 13mm, rebated, DIN left Door 0290 01 Lock TWS 94 LI Dorn TS 13mm (coin release) 0290 02 Lock TWS 94 LI Münz TS 13mm (key release)

Door knob

0234 10 Door Knob TK80 (Pair)

- To fix drill two 7mm diam. holes in the door. The distance between the drills being horizontally is 38mm.
The front hole should be 46mm from the door's outer edge.
- We recommend the use of 2 Nos 4x40mm countersunk screws to screw the knobs together through the door.

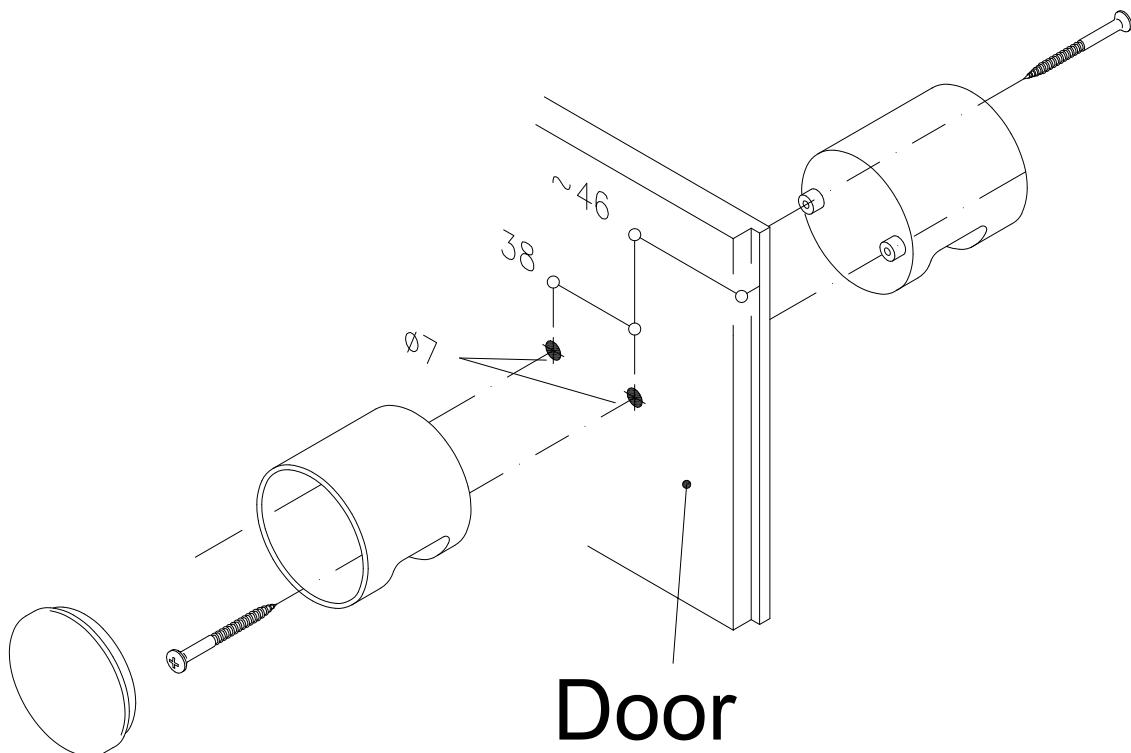


Anti-vision strip

0289 440 Anti-vision strip

- Profile-strips made of PVC to be used with partitioning systems.
These strips are meant to be an alternative to aluminium-strips or folded high pressure laminates.
Anti-vision strips are to be mounted at the side of hinges of the door respectively panels.
- The strips are extruded from a soft and a hard PVC in a special method. The hard section is to be fixed in the gable end of the slitted laminates. The soft section of strip is for sound-damping and finger protection.
The measurements of slits required are: width = 3mm; and depth = 8mm.
- The strips are pressure-sensitive and can be easily hammered into the existing slit.
Fix length of strips is 2050mm and can be cut to the size required on site.
Supply of special lengths is not possible.
- Colours available: Black (16), White (19)
- Length supplied: 2050mm

Anti-vision strip

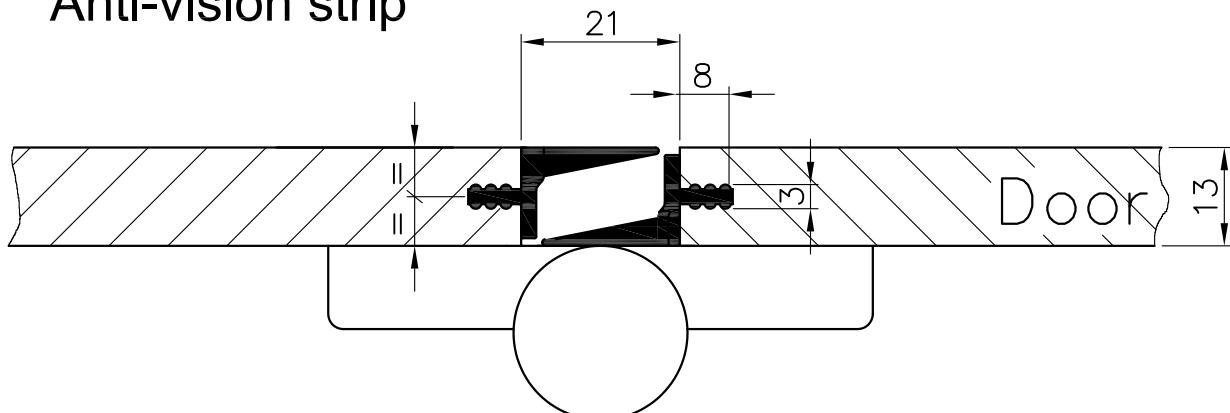

Leading edge finger protection strip

0289 45 Leading edge finger protection strip


- Profile-strips made of PVC to be used with partitioning systems.
These strips are meant to be an alternative to aluminium-strips or folded high pressure laminates.
Anti-vision strips are to be mounted at the side of hinges of the door respectively panels.

- The strips are extruded from a soft and a hard PVC in a special method. The hard section is to be fixed in the gable end of the slotted laminates. The soft section of strip is for sound-damping and finger protection.
The measurements of slits required are: width = 3mm; and depth = 8mm.

- The strips are pressure-sensitive and can be easily hammered into the existing slit.
Fix length of strips is 2050mm and can be cut to the size required on site.
Supply of special lengths is not possible.

- Colours available: Black (16), White (19)
- Length supplied: 2050mm

Leading edge finger protection strip

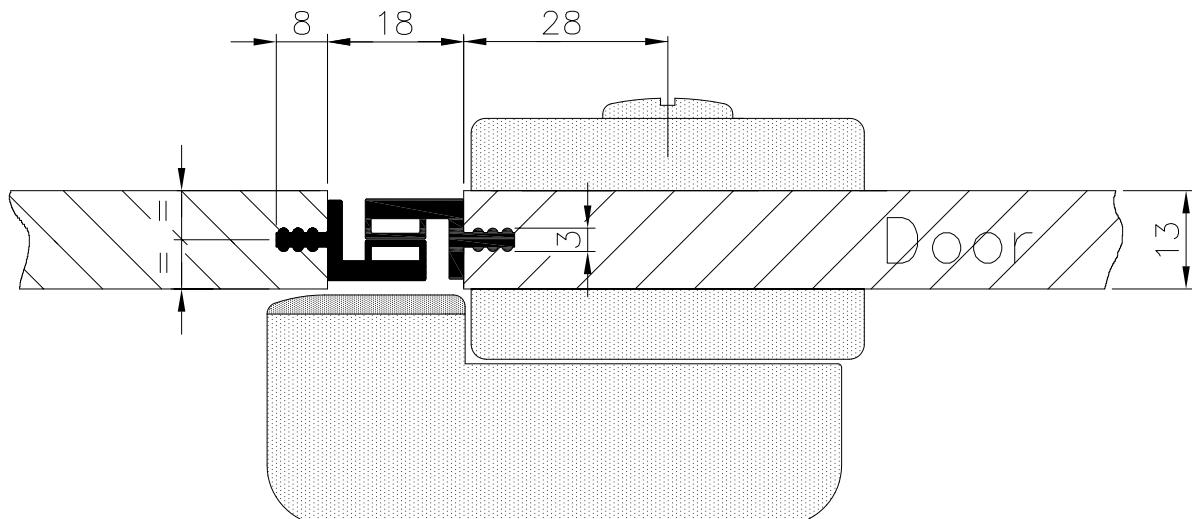

Example of Assembly Partitioning Systems: Blank piece list

Customer: _____

Reference: _____


Description: _____

Product Code	Description	Unit	Qty
Top rail with wall fixing	0289 230 Nylon sleeve Ø34.720	piece	
	0289 250 Steel tube Ø26x2	m	
	0289 280 Threaded rod M12x2000 STCB	piece	
	0289 290 Threaded rod M12x3000 STCB	piece	
	0289 320 Connection nut	piece	
	0289 301 Distance clip	10 piece	
	0289 330 Jointing piece	piece	
	0289 150 Wall fixing, steelcored	piece	
	0289 360 T-Piece	piece	
	0289 340 Bend 34.90°	piece	
Partitioning panels	0289 350 Bend 34.45°	piece	
	0289 040 Tubular panel holder	piece	
	0289 060 Wall panel holder	piece	
	0289 050 Right angle bracket	piece	
	0289 030 Adjustable foot with anchor fixing	piece	
	0289 020 Adjustable foot without anchor fixing	piece	
Door	0289 620 Spacer 3mm	set	
	0341 010 Cubicle hinge TB 78 DIN (right)	piece	
	0341 020 Cubicle hinge TB 78 DIN (left)	piece	
	0529 010 Cubicle hinge TB 82 DIN (right)	piece	
	0529 020 Cubicle hinge TB 82 DIN (left)	piece	
	0840 010 Privacy thumbturn (coin release, door thickness 13mm)	piece	
	0290 010 Wet cubicle lock TWS 94 LI Münz TS13 (coin release)	piece	
	0290 020 Wet cubicle lock TWS 94 RE Münz TS13 (coin release)	piece	
	0290 110 Wet cubicle lock TWS 94 LI Dorn TS13 (key release)	piece	
	0290 120 Wet cubicle lock TWS 94 RE Dorn TS13 (key release)	piece	
Accessories	0234 100 Door knob TK 80	pair	
	0289 440 Anti-vision strip	piece	
	0289 450 Leading edge finger protection strip	piece	
	Paper roll holder see catalogue Bathroom Acc. & Special Needs - section 9.1 ...	piece	
	Shelves see catalogue Bathroom Acc. & Special Needs - section 9.1 ...	piece	
	Mirror holder see catalogue Bathroom Acc. & Special Needs - section 9.4 ...	piece	
Locks for partitioning panels >20mm	Hooks see catalogue Bathroom Acc. & Special Needs - section 9.4 ...	piece	
	0256 010 Mortice lock 76 WC STULP 13	piece	
	0256 020 Mortice lock 76 PZ STULP 13	piece	
	0256 050 Mortice lock 76 PZ STULP 4.5	piece	
	0256 060 Mortice lock 76 WC STULP 4.5	piece	


Example of Assembly Wet Cubicle System: 3 cabins between 2 walls

Customer:			
Reference:			
Description:			
Singgle parts for ordering:			
Product Code	Description	Unit	Qty
0289 230	Nylon sleeve Ø34; 220	piece	5
0289 250	Steel tube Ø28x2	m	4
0289 280	Threaded rod M12x2000 STCB	piece	2
0289 290	Threaded rod M12x3000 STCB	piece	-
0289 320	Connection nut	piece	-
0289 301	Distance clip	piece	3
0289 330	Joining piece	10 piece	1
0289 150	Wall fixing, steelcored	piece	-
0289 360	T-Piece	piece	2
0289 340	Bend 34,90°	piece	-
0289 350	Bend 34,45°	piece	-
0289 040	Tubular panel holder	piece	6
0289 060	Wall panel holder	piece	12
0289 050	Right angle bracket	piece	12
0289 030	Adjustable tool with anchor fixing	piece	-
0289 020	Adjustable tool without anchor fixing	piece	6
0289 820	Spacer 3mm	set	3
0341 010	Cubicle hinge TB 8 DIN (right)	piece	6
0341 020	Cubicle hinge TB 8 DIN (left)	piece	6
0529 010	Cubicle hinge TB 82 DIN (right)	piece	3
0529 020	Cubicle hinge TB 82 DIN (left)	piece	-
0840 010	Privacy thumbturn (coin release, door thickness 13mm)	piece	3
0290 010	Wet cubicle lock TWS 94 LL Münz TS13 (coin release)	piece	-
0290 020	Wet cubicle lock TWS 94 RE Münz TS13 (coin release)	piece	-
0290 110	Wet cubicle lock TWS 94 LL Dorn TS13 (key release)	piece	-
0290 120	Wet cubicle lock TWS 94 RE Dorn TS13 (key release)	piece	-
0234 100	Door knob TK 80	pair	3
0289 440	Anti-vision strip	piece	6
0289 450	Leading edge finger protection strip	piece	6
see catalogue Bathroom Fix. & Special Needs - section 9.1 ...			
see catalogue Bathroom Fix. & Special Needs - section 9.1 ...			
Shelves			
see catalogue Bathroom Fix. & Special Needs - section 9.4 ...			
Mirror holder			
see catalogue Bathroom Fix. & Special Needs - section 9.4 ...			
Hobs			
see catalogue Bathroom Fix. & Special Needs - section 9.4 ...			
0256 010	Mortice lock 76 WC STULP 13	piece	-
0256 020	Mortice lock 76 FZ STULP 13	piece	-
0256 050	Mortice lock 76 FZ STULP 4.5	piece	-
0256 060	Mortice lock 76 WC STULP 4.5	piece	-

Application example

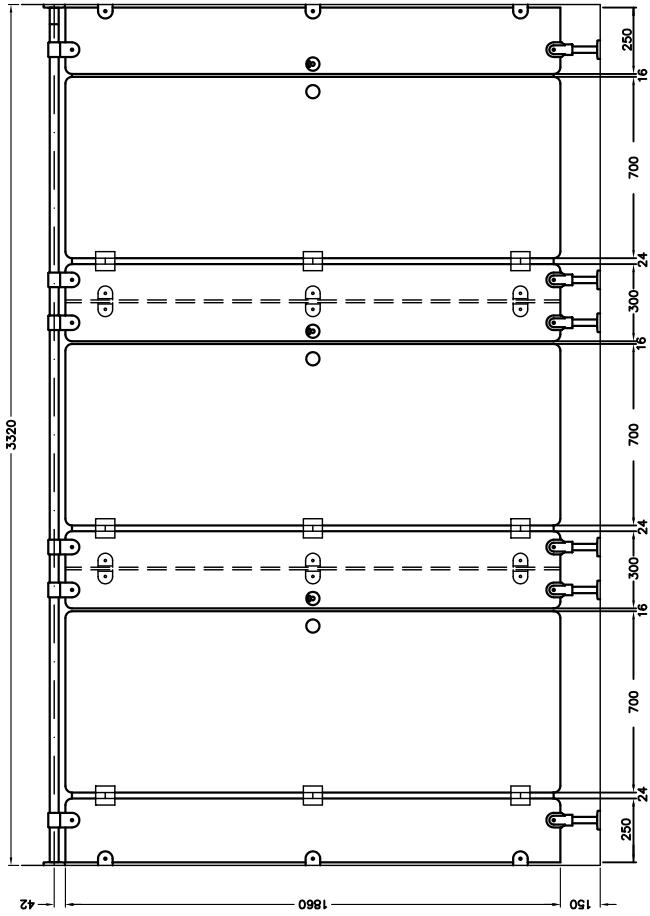
















Plan view

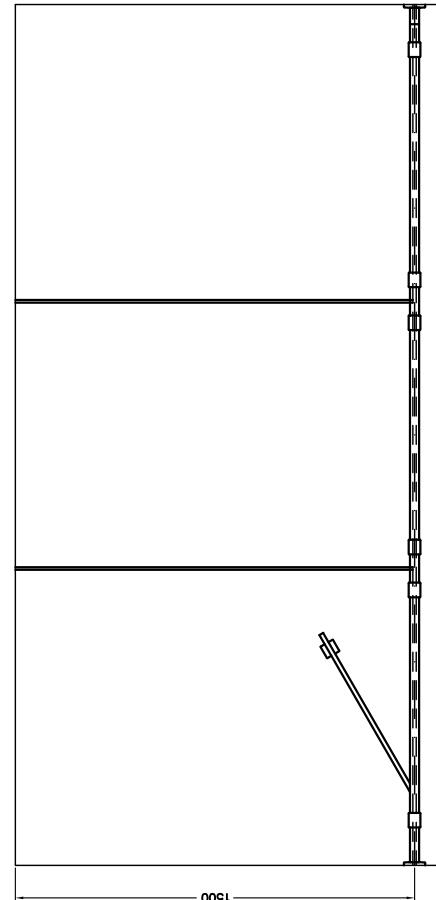

Sample of Assembly: 3 cabins L-shaped

Customer:																																																																																																																															
Reference:																																																																																																																															
Description:																																																																																																																															
Single parts for ordering:																																																																																																																															
<table border="1"> <thead> <tr> <th>Product Code</th> <th>Description</th> <th>Unit</th> <th>Qty</th> </tr> </thead> <tbody> <tr> <td>0289 230</td> <td>Nylon sleeve Ø34.720</td> <td>piece</td> <td>7</td> </tr> <tr> <td>0289 250</td> <td>Steel tube Ø26x2</td> <td>m</td> <td>5</td> </tr> <tr> <td>0289 250</td> <td>Threaded rod M12x200 STCB</td> <td>piece</td> <td>3</td> </tr> <tr> <td>0289 250</td> <td>Threaded rod M12x300 STCB</td> <td>piece</td> <td>3</td> </tr> <tr> <td>0289 320</td> <td>Connection nut</td> <td>piece</td> <td>3</td> </tr> <tr> <td>0289 301</td> <td>Distance clip</td> <td>10 piece</td> <td>1</td> </tr> <tr> <td>0289 330</td> <td>Jointing piece</td> <td>piece</td> <td>-</td> </tr> <tr> <td>0289 150</td> <td>Wall fixing, steelcored</td> <td>piece</td> <td>2</td> </tr> <tr> <td>0289 360</td> <td>T-Fence</td> <td>piece</td> <td>-</td> </tr> <tr> <td>0289 340</td> <td>Bend 34.90°</td> <td>piece</td> <td>1</td> </tr> <tr> <td>0289 350</td> <td>Bend 34.45°</td> <td>piece</td> <td>-</td> </tr> <tr> <td>0289 040</td> <td>Tubeular panel holder</td> <td>piece</td> <td>6</td> </tr> <tr> <td>0289 060</td> <td>Wall panel holder</td> <td>piece</td> <td>12</td> </tr> <tr> <td>0289 050</td> <td>Right angle bracket</td> <td>piece</td> <td>12</td> </tr> <tr> <td>0289 030</td> <td>Adjustable foot with anchor fixing</td> <td>piece</td> <td>-</td> </tr> <tr> <td>0289 020</td> <td>Adjustable foot without anchor fixing</td> <td>piece</td> <td>6</td> </tr> <tr> <td>0289 620</td> <td>Spacer 3mm</td> <td>set</td> <td>3</td> </tr> <tr> <td>0341 010</td> <td>Cubicle hinge TB 76 DIN (right)</td> <td>piece</td> <td>6</td> </tr> <tr> <td>0341 020</td> <td>Cubicle hinge TB 76 DIN (left)</td> <td>piece</td> <td>-</td> </tr> <tr> <td>0529 010</td> <td>Cubicle hinge TB 82 DIN (right)</td> <td>piece</td> <td>3</td> </tr> <tr> <td>0529 020</td> <td>Cubicle hinge TB 82 DIN (left)</td> <td>piece</td> <td>-</td> </tr> <tr> <td>0840 010</td> <td>Privacy thumbturn (coin release, door thickness 13mm)</td> <td>piece</td> <td>3</td> </tr> <tr> <td>0280 010</td> <td>Wet cubicle lock (WS 94 L) Minz TS13 (coin release)</td> <td>piece</td> <td>-</td> </tr> <tr> <td>0280 020</td> <td>Wet cubicle lock (WS 94 RE Münz TS13 (coin release))</td> <td>piece</td> <td>-</td> </tr> <tr> <td>0280 110</td> <td>Wet cubicle lock (WS 94 L) Dorn TS13 (key release)</td> <td>piece</td> <td>-</td> </tr> <tr> <td>0280 120</td> <td>Wet cubicle lock (WS 94 RE Dorn TS13 (key release))</td> <td>piece</td> <td>-</td> </tr> <tr> <td>0234 100</td> <td>Door knob TK 80</td> <td>pair</td> <td>3</td> </tr> <tr> <td>0289 440</td> <td>Anti-vision strip</td> <td>piece</td> <td>6</td> </tr> <tr> <td>0289 450</td> <td>Leading edge finger protection strip</td> <td>piece</td> <td>6</td> </tr> <tr> <td colspan="2">Accessories</td></tr> <tr> <td colspan="2">Panels for partitioning panels >20mm</td></tr> <tr> <td colspan="2">Locks for partitioning panels >20mm</td></tr> </tbody> </table>		Product Code	Description	Unit	Qty	0289 230	Nylon sleeve Ø34.720	piece	7	0289 250	Steel tube Ø26x2	m	5	0289 250	Threaded rod M12x200 STCB	piece	3	0289 250	Threaded rod M12x300 STCB	piece	3	0289 320	Connection nut	piece	3	0289 301	Distance clip	10 piece	1	0289 330	Jointing piece	piece	-	0289 150	Wall fixing, steelcored	piece	2	0289 360	T-Fence	piece	-	0289 340	Bend 34.90°	piece	1	0289 350	Bend 34.45°	piece	-	0289 040	Tubeular panel holder	piece	6	0289 060	Wall panel holder	piece	12	0289 050	Right angle bracket	piece	12	0289 030	Adjustable foot with anchor fixing	piece	-	0289 020	Adjustable foot without anchor fixing	piece	6	0289 620	Spacer 3mm	set	3	0341 010	Cubicle hinge TB 76 DIN (right)	piece	6	0341 020	Cubicle hinge TB 76 DIN (left)	piece	-	0529 010	Cubicle hinge TB 82 DIN (right)	piece	3	0529 020	Cubicle hinge TB 82 DIN (left)	piece	-	0840 010	Privacy thumbturn (coin release, door thickness 13mm)	piece	3	0280 010	Wet cubicle lock (WS 94 L) Minz TS13 (coin release)	piece	-	0280 020	Wet cubicle lock (WS 94 RE Münz TS13 (coin release))	piece	-	0280 110	Wet cubicle lock (WS 94 L) Dorn TS13 (key release)	piece	-	0280 120	Wet cubicle lock (WS 94 RE Dorn TS13 (key release))	piece	-	0234 100	Door knob TK 80	pair	3	0289 440	Anti-vision strip	piece	6	0289 450	Leading edge finger protection strip	piece	6	Accessories		Panels for partitioning panels >20mm		Locks for partitioning panels >20mm	
Product Code	Description	Unit	Qty																																																																																																																												
0289 230	Nylon sleeve Ø34.720	piece	7																																																																																																																												
0289 250	Steel tube Ø26x2	m	5																																																																																																																												
0289 250	Threaded rod M12x200 STCB	piece	3																																																																																																																												
0289 250	Threaded rod M12x300 STCB	piece	3																																																																																																																												
0289 320	Connection nut	piece	3																																																																																																																												
0289 301	Distance clip	10 piece	1																																																																																																																												
0289 330	Jointing piece	piece	-																																																																																																																												
0289 150	Wall fixing, steelcored	piece	2																																																																																																																												
0289 360	T-Fence	piece	-																																																																																																																												
0289 340	Bend 34.90°	piece	1																																																																																																																												
0289 350	Bend 34.45°	piece	-																																																																																																																												
0289 040	Tubeular panel holder	piece	6																																																																																																																												
0289 060	Wall panel holder	piece	12																																																																																																																												
0289 050	Right angle bracket	piece	12																																																																																																																												
0289 030	Adjustable foot with anchor fixing	piece	-																																																																																																																												
0289 020	Adjustable foot without anchor fixing	piece	6																																																																																																																												
0289 620	Spacer 3mm	set	3																																																																																																																												
0341 010	Cubicle hinge TB 76 DIN (right)	piece	6																																																																																																																												
0341 020	Cubicle hinge TB 76 DIN (left)	piece	-																																																																																																																												
0529 010	Cubicle hinge TB 82 DIN (right)	piece	3																																																																																																																												
0529 020	Cubicle hinge TB 82 DIN (left)	piece	-																																																																																																																												
0840 010	Privacy thumbturn (coin release, door thickness 13mm)	piece	3																																																																																																																												
0280 010	Wet cubicle lock (WS 94 L) Minz TS13 (coin release)	piece	-																																																																																																																												
0280 020	Wet cubicle lock (WS 94 RE Münz TS13 (coin release))	piece	-																																																																																																																												
0280 110	Wet cubicle lock (WS 94 L) Dorn TS13 (key release)	piece	-																																																																																																																												
0280 120	Wet cubicle lock (WS 94 RE Dorn TS13 (key release))	piece	-																																																																																																																												
0234 100	Door knob TK 80	pair	3																																																																																																																												
0289 440	Anti-vision strip	piece	6																																																																																																																												
0289 450	Leading edge finger protection strip	piece	6																																																																																																																												
Accessories																																																																																																																															
Panels for partitioning panels >20mm																																																																																																																															
Locks for partitioning panels >20mm																																																																																																																															

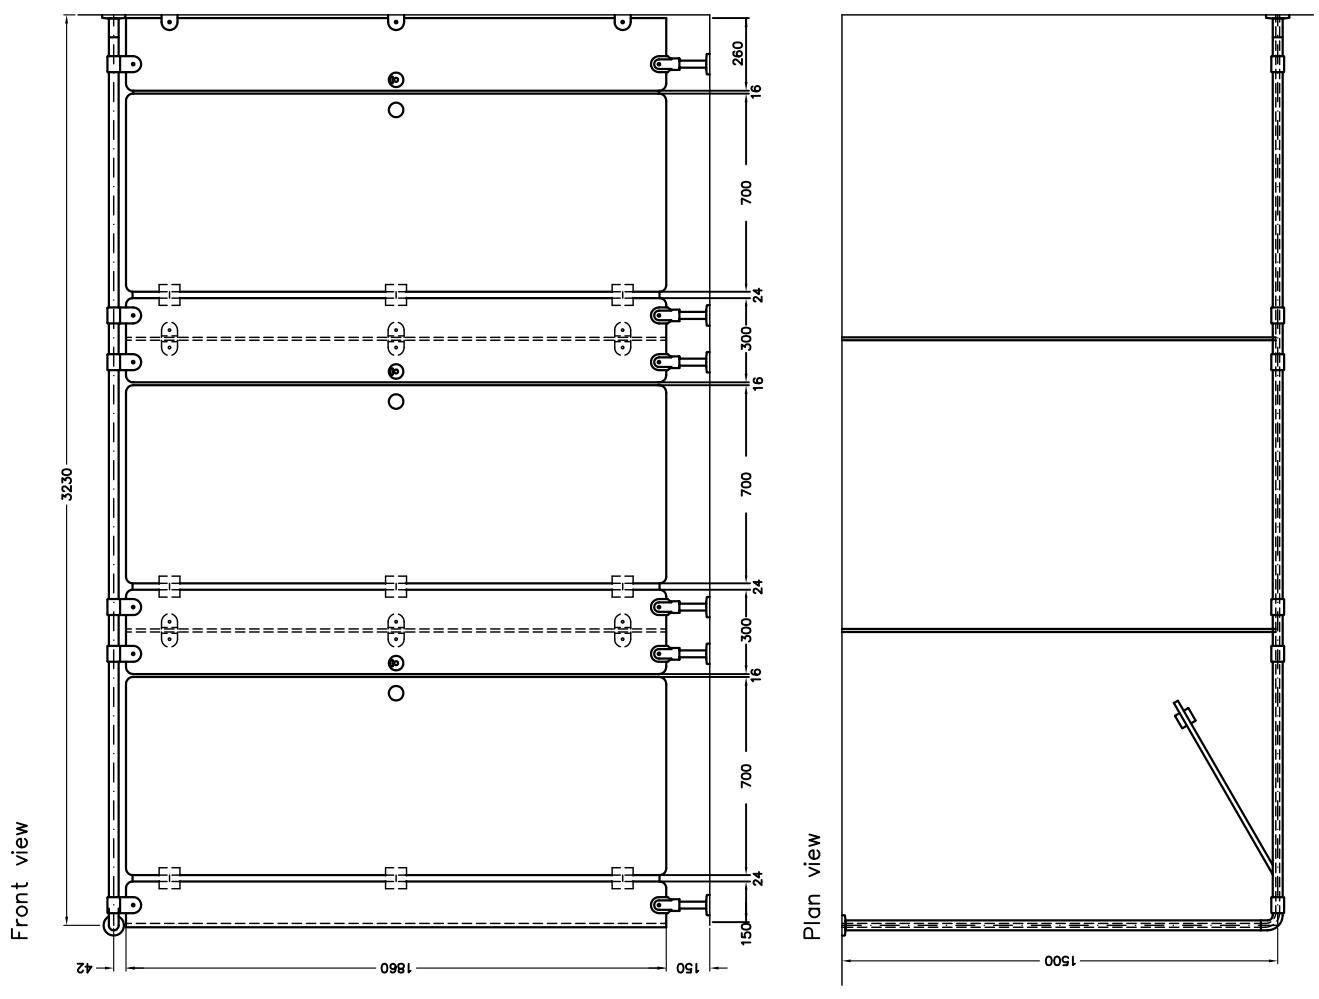

Supplied as a standard	Additional fixing material on request
 0289 150 Wall fixing	 for wall fixing 0365 670 Screw pack: 8074 450 Countersunk screws 6x60 (4x) 8073 030 S8 plugs (4x)
 0289 040 Tubular panel holder 0289 580 Cover cap (2x) 0289 590 Screw socket (1x) 8074 400 Countersunk screw 5x20 (2x)	 for tubular panel holder, wall panel holder, adjustable foot: 0289 100 Socket screw + cover cap - set 0289 580 Cover cap (1x) 0289 590 Screw socket (1x)
 0289 060 Wall panel holder 0289 580 Cover cap (1x) 0289 590 Screw socket (1x) 8074 400 Countersunk screw 5x20 (1x)	 for wall fixing 8074 450 Countersunk screw 6x60 (1x) 8073 030 S8 plug (1x)
 0289 050 Right angle bracket (single) 0289 580 Cover cap (2x)	 for fixing to panel: 8070 020 Tap screw M5x16 (1x) for wall fixing: 8074 450 Countersunk screw 6x60 (1x) 8073 030 S8 plug (1x)
 0289 050 Right angle bracket (Pair) 0289 580 Cover cap (4x)	 for bolt-through fixing to panel: 0289 180 Screw pack: 8070 020 Tap screw M5x16 (1x) 8044 050 Socket M5x15 (1x) for wall fixing: 8074 450 Countersunk screw 6x60 (1x) 8073 030 S8 plug (1x)
 0289 120 Adjustable foot 0289 580 Cover cap (1x) 0289 590 Screw socket (1x) 8074 410 Countersunk screw 5x30 (1x)	 for fixing to floor: 0365 670 Screw pack: 8074 450 Countersunk screw 6x60 (4x) 8073 030 S8 plug (4x)
 0529 010 Cubicle hinge 0341 510 Cover for cubicle hinge (1x)	 for fixing to panel: 2980 073 Screw pack 4(M6X16 DIN7991 A2)
 0840 010 Privacy thumbturn 0840 770 Screw pack: 8047 360 Countersunk screw M4x25 (2x)	
 0290 010-120 Wet cubicle lock 0290 200 Screw pack: 8047 360 Countersunk screw M4x25 (2x) 8045 300 Countersunk screw M6x20 (2x)	 8045 300 Countersunk screw M6x20 (3x)
 0234 100 Door knob 0070 320 Screw pack: 8074 100 Countersunk screw 4x40 (2x)	